제품 사양

치수	미터법	영국식
최대 고소작업 높이	24.30m	79ft 9in
최대 플랫폼 높이	22.30m	73ft 2in
최대 조작 범위(+0.6m)	17.10m	56ft 1in
최대 플랫폼 범위	16.50m	54ft 2in
평판 운반 치수(L×W×H)	9.85m×2.50m×2.89m	32ft 4in×8ft 2in×9ft 6in
표준 컨테이너 운송	모두 적용 가능	모두 적용 가능
플랫폼 크기(길이×너비)	2.44m×0.91m	8ft×3ft
턴테이블 테일스윙	1.61m	5ft 3in
지상 간극 Ⓐ	0.41m	1ft 4in
휠베이스 Ⓑ	2.80m	9ft 2in
회전 반경(내부/외부)	1.87m/3.22m	6ft 2in/10ft 7in
타이어	385/45-28	385/45-28
최대 위아래 간극	9.14m	30ft
최대 하향 탐침 깊이	4.03m	13ft 3in

성능		
안전한 작업 부하	300kg	661lb
최대 작업자 수	2	2
등급성	45%	45%
이동 속도(견인)	≯6.0km/h	≯3.7mph
이동 속도(상승)	≯1.1km/h	≯0.7mph
최대 고소작업 경사	X-5°/Y-5°	X-5°/Y-5°
터릿 회전	360°연속	360°연속
플랫폼 회전	180°	180°
지브 무브먼트	135°	135°

중량		
전체 중량	17200kg	37919lb

전원		
디젤 엔진	Deutz TD2.9 L4/55.4kW	Deutz TD2.9 L4/55.4kW
비상 전원 공급 장치	12V	12V
디젤 탱크	135L	35gal
유압 탱크	165L	43gal

엔진

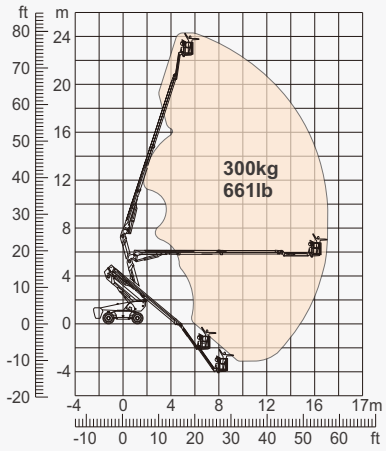

동작 범위

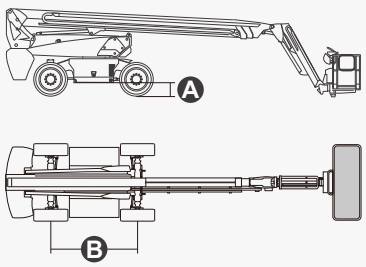

DINGLI
Exceed · New Height

BA24RT
모듈식 붐 시리즈

기능

표준 항목

- 2.31m (7ft 7in) 지브
- 전방 진동 차축
- 4륜 스티어링
- 4륜 구동
- 셀프 레벨 조정 플랫폼
- 좌우 180° 스윙 플랫폼
- 비례 조이스틱 컨트롤
- 썸 로커 조향기
- 드라이브 활성화
- 플랫폼 측 AC 전선 연결
- 기울기 경보
- 하강 알람
- 점멸 LED 비콘
- 경적
- 시간계
- 건설기계용 일체형 특수 구동 차축
- 360 ° 연속 턴테이블 회전
- 포지티브 트랙션 4륜 구동
- 플랫폼 적재물 감지 장치
- 장애 진단 시스템
- 작업자 압출 방지 보호 장치
- 혹독 환경 키트
- 12V DC 보조 전원
- Deutz D2.9 L4 55.4kW /2600rpm 디젤 엔진
- 유압유 방열기
- 재시동 방지 엔진 보호
- 역추진 방지 엔진 장치
- 자동 엔진 결함 셧다운

관절 붐-BA | 고소작업 높이-24m | 지브 | 디젤 엔진 | 험준한 지형-RT

침입 방지 장치



다양한 스티어링 모드

ZHEJIANG DINGLI MACHINERY CO., LTD.
Address: No.188 Qihang Road,Deqing,Zhejiang P.R.C 313219
Telephone: +86(572)8681688
E-Mail: export@cndingli.com
Https://www.cndingli.com

Due to continuous technology updates, technical parameters are subject to change without notice. This picture book is for reference only, the actual product shall prevail. The copyright is owned by zhejiang dingli, any content may not be copied for any purpose without written permission.
2025-04