DINGLI
Exceed · New Height

JCPT1523MRT2
시저 리프트 시리즈

제품 사양

치수	미터법	영국식
최대 고소작업 높이 **A**	15.00m	49' 3"
최대 플랫폼 높이 **B**	13.00m	42' 8"
최대 구동 높이	13.00m	42' 8"
전체 길이 **C**	4.88m	16'
전체 너비 **D**	2.33m	7' 8"
전체 높이(레일 업) **E**	3.02m	9' 11"
전체 높이(레일 다운) **F**	2.26m	7' 5"
플랫폼 크기(길이 × 너비)	4.88m×1.83m	16'×6'
플랫폼 확장 크기 **G** / **H**	1.43m/1.13m	4' 8"/3' 8"
지상 간극(견인/상승)	0.30m	1'
휠베이스 **I**	2.86m	9' 5"
회전 반경(내부/외부)	2.70m/5.50m	8' 10"/18'
타이어	315/55/D20	315/55/D20

성능		
S.W.L	680kg	1499lb
확장 시 S.W.L	227kg	500lb
최대 탑승자 CE 요건(실내/실외)	7/7	7/7
등급성	40%	40%
이동 속도(견인)	≠6.0km/h	≠3.73mph
이동 속도(상승)	≠1.0km/h	≠0.62mph
최대 고소작업 경사(X/Y)	2°/3°	2°/3°
위/아래 속도	73/62sec	73/62sec

중량		
전체 중량(아웃트리거 제외)	7240kg	15961lb
전체 중량(아웃트리거 포함)	8140kg	17946lb

전원		
디젤 엔진	Kubota D1105/18.2kW	Kubota D1105/18.2kW
디젤 탱크	80L	21gal
유압 탱크	120L	31gal
리튬 배터리	80VDC/67.5Ah	80VDC/67.5Ah
모터	80VDC/10kW	80VDC/10kW

MHEV

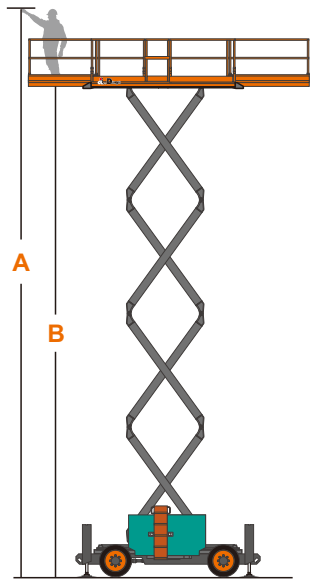

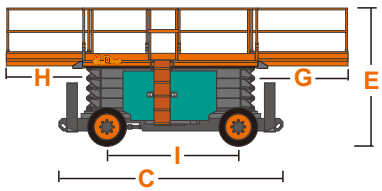



DINGLI
Exceed · New Height

JCPT1523MRT2
시저 리프트 시리즈

기능

표준 항목

- 비례 조이스틱 컨트롤
- 플랫폼 측 자체 잠금식 게이트
- 이중 슬라이드 아웃 플랫폼 확장 데크
- 4륜 구동
- 이륜 조향
- 건설기계용 일체형 특수 구동 차축
- 자동 제동 장치
- 셀프 웨이트 강하 장치
- 실린더 유지 밸브
- 기내 진단 장치
- 기울기 경보
- 모든 모션 알람
- 경적
- 시간계
- 유압유 냉각 장치
- 점멸 LED 비콘
- 접이식 가드 레일
- 드라이브 활성화
- 수동 브레이크 해제
- 랜야드 부착 지점
- 타이 다운 및 승강 지점
- 자동 수평 유압 아웃트리거
- 재시동 방지 엔진 보호
- 비상 펌프
- 비상 정지 버튼
- 플랫폼 적재물 감지 장치
- 진동 차축 섀시

ZHEJIANG DINGLI MACHINERY CO., LTD.
Address: No.188 Qihang Road,Deqing,Zhejiang P.R.C 313219
Telephone: +86(572)8681688
E-Mail: export@cndingli.com
Https://en.cndingli.com

Due to continuous technology updates, technical parameters are subject to change without notice. This picture book is for reference only, the actual product shall prevail. The copyright is owned by zhejiang dingli, any content may not be copied for any purpose without written permission.
2025-03