


## 제품 사양

치수	Metric	British
최대 고소작업 높이	12.40m	40ft 8in
최대 플랫폼 높이	10.40m	34ft 1in
전체 길이 <b>A</b>	3.82m	12ft 6in
전체 너비 <b>B</b>	1.50m	4ft 11in
전체 높이 <b>C</b>	1.99m	6ft 6in
최대 수평 도달	5.50m	18ft
최대 위아래 간극	7.00m	23ft
플랫폼 크기(길이 × 너비)	0.75m×1.50m	2ft 5in×4ft 11in
지상 간극(견인/상승)	0.1m/0.015m	4in/1in
휠베이스	1.60m	5ft 3in
회전 반경(내부/외부)	1.00m/2.80m	3ft 3in/9ft 2in
타이어 <b>D</b>	Φ470×178mm	Φ470×178mm
<b>성능</b>		
S.W.L	250kg	551lb
최대 탑승자 요건(실내/실외)	2	2
등급성	25%	25%
이동 속도(견인)	≈4.5km/h	≈2.80mph
이동 속도(상승)	≈0.5km/h	≈0.31mph
최대 고소작업 경사(X/Y)	2.5°/2.5°	2.5°/2.5°
위/아래 속도	42/37sec	42/37sec
터릿 회전	345°	345°
지브 무브먼트	60° ~ -60°	60° ~ -60°
플랫폼 회전	±60°	±60°
<b>중량</b>		
전체 중량	4970kg	10957lb
<b>전원</b>		
유지 보수가 필요 없는 납 축전지	48V/200Ah	48V/200Ah
충전기	48V/35A	48V/35A
구동 모터	2×32VAC/2.0kW	2×32VAC/2.0kW
승강 모터	30VAC/5.0kW	30VAC/5.0kW

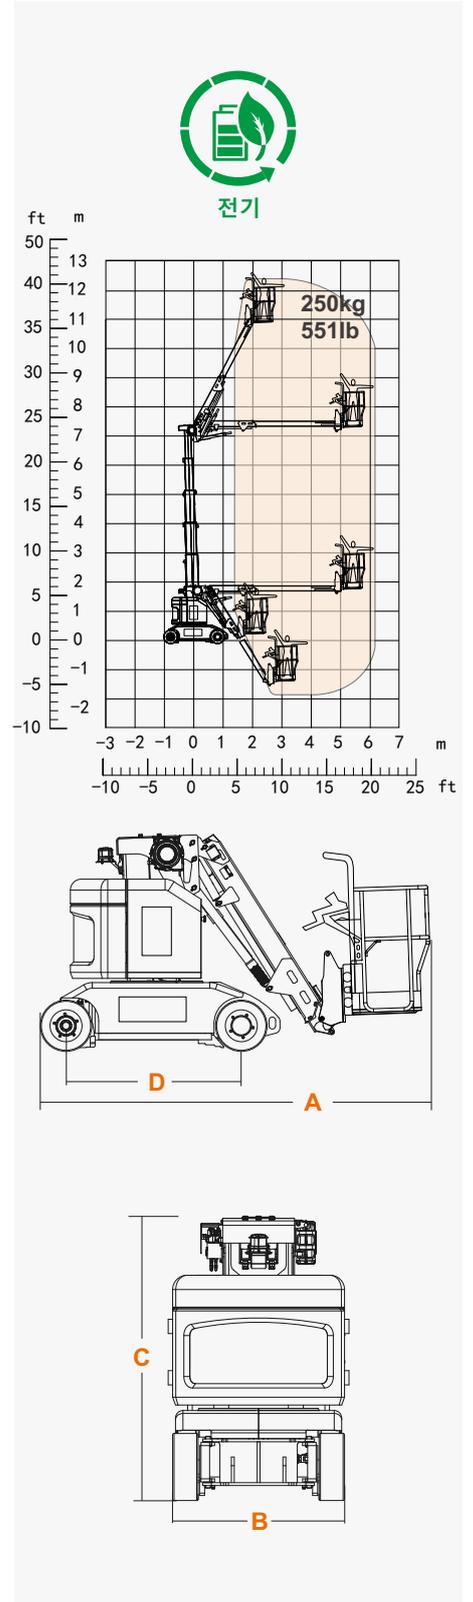

## 기능

### 표준 항목

- 비레 조이스틱 컨트롤
- 전체 높이에서 구동 가능
- 룬 제동
- 비상 하강 장치
- 비상 정지 버튼
- 장애 진단 시스템
- 기울기 경보
- 모든 모션 알람
- 경적
- 시간계
- 충전 보호 장치
- 점멸 비콘
- 플랫폼 적재물 감지 장치



### ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688

E-Mail: export@cndingli.com

Https://en.cndingli.com

Due to continuous technology updates, technical parameters are subject to change without notice. This picture book is for reference only, the actual product shall prevail. The copyright is owned by zhejiang dingli, any content may not be copied for any purpose without written permission.

2025-03

