

## 제품 사양

치수	Metric	British
최대 고소작업 높이 <b>A</b>	7.60m	24ft 11in
최대 플랫폼 높이 <b>B</b>	5.60m	18ft 4in
전체 길이 <b>C</b>	2.00m	6ft 7in
전체 너비 <b>D</b>	1.00m	3ft 3in
전체 높이 <b>E</b>	2.20m	7ft 3in
플랫폼 크기(길이 × 너비)	1.39×0.76m	4ft 7in×2ft 6in
지상 간극(견인)	0.018m	1in
휠베이스	1.10m	3ft 7in
회전 반경(내부/외부)	0.60m/1.80m	2ft/5ft 11in
타이어	Φ230×100mm	Φ230×100mm

성능		
S.W.L	272kg	600lb
최대 탑승자 요건(실내/실외)	1/0	1/0
이동 속도(견인)	≈3.6km/h	≈2.24mph
이동 속도(상승)	≈0.5km/h	≈0.31mph
최대 고소작업 경사(X/Y)	1.5°/3°	1.5°/3°
위/아래 속도	34/34sec	34/34sec




중량		
전체 중량	1380kg	3042lb

전원		
유지 보수가 필요 없는 납 축전지	2x12V/115Ah	2x12V/115Ah
충전기	24V/15A	24V/15A
구동 모터	2x15VAC/0.68kW	2x15VAC/0.68kW
승강 모터	24VDC/1.4kW	24VDC/1.4kW



전기

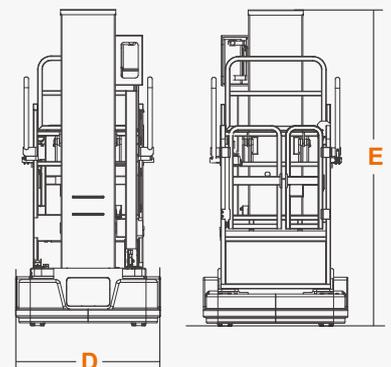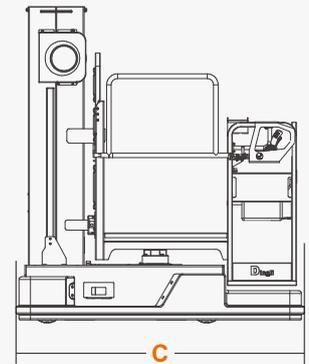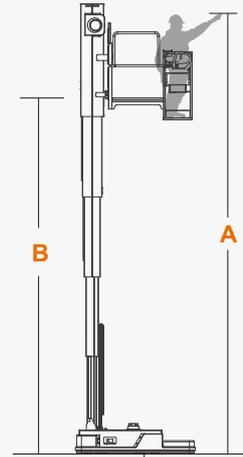

## 기능

### 표준 항목

- 비례 제어
- 전체 높이에서 구동 가능
- 자동 제동 장치
- 비상 하강 장치
- 비상 정지 버튼
- 기내 진단 장치
- 기울기 센서(알람 제공)
- 모든 모션 알람
- 경적
- 작업 시간 표시
- 충전 보호 장치
- 점멸 LED 비콘
- 과부하 센서(알람 제공)



### ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688

E-Mail: export@cndingli.com

Https://en.cndingli.com

Due to continuous technology updates, technical parameters are subject to change without notice. This picture book is for reference only, the actual product shall prevail. The copyright is owned by zhejiang dingli, any content may not be copied for any purpose without written permission.

2025-03

