




제품 사양

치수	미터법	영국식
최대 고소작업 높이 A	9.50m	31ft 2in
최대 플랫폼 높이 B	7.50m	24ft 7in
전체 길이 C	1.44m	4ft 9in
전체 너비 D	0.80m	2ft 7in
전체 높이 E	1.99m	6ft 6in
플랫폼 크기(길이 F × 너비 G)	0.75m×0.73m	2ft 5in×2ft 5in
플랫폼 확장 크기 H	0.53m	1ft 9in
지상 간극(견인)	0.06m	2in
지상 간극(상승)	0.014m	1in
휠베이스	1.12m	3ft 8in
회전 반경(내부/외부)	0/1.58m	0/5ft 2in
타이어	Φ323×100mm	Φ323×100mm

성능		
안전한 작업 부하	136kg	299lb
최대 작업자 수	1/0	1/0
등급성	25%	25%
최대 고소작업 경사	1.5°/ 3°	1.5°/ 3°
이동 속도(견인)	≈4.0km/h	≈2.49mph
이동 속도(상승)	≈0.6km/h	≈0.37mph
위/아래 속도	29/32sec	29/32sec

중량		
중량	1560kg	3439lb

전원		
배터리	24V/115Ah	24V/115Ah
충전기	24VDC/15A	24VDC/15A
구동 모터	2×24VDC/1.0kW	2×24VDC/1.0kW
승강 모터	24VDC/2.0kW	24VDC/2.0kW

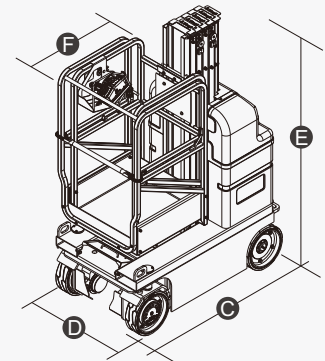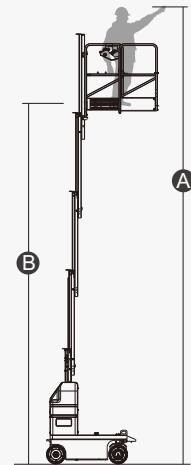

기능

표준 항목

- 비례 조이스틱 컨트롤
- 플랫폼 측 자체 잠금식 게이트
- 원-웨이 플랫폼 확장 데크
- 전체 높이에서 구동 가능
- 비-마킹 타이어
- 2륜 구동
- 2륜 스티어링
- 자동 제동 장치
- 비상 하강 장치
- 실린더 유지 밸브
- 기내 진단 장치
- 기울기 경보
- 모든 모션 알람
- 경적
- 시간계
- 표준 운송 지게차 구멍
- 충전 보호 장치
- 점멸 LED 비콘
- 자동 구멍 보호
- 드라이브 활성화
- 충전 표시등
- 수동 브레이크 해제
- 랜야드 부착 지점
- 타이 다운 및 승강 지점
- 플랫폼 적재물 감지 장치
- 비상 정지 버튼



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688

E-Mail: export@cndingli.com

<https://en.cndingli.com>

Due to continuous technology updates, technical parameters are subject to change without notice. This picture book is for reference only, the actual product shall prevail. The copyright is owned by zhejiang dingli, any content may not be copied for any purpose without written permission.

2025-03

